

THERMAXX

ADVANTAGE

THE LEADERS IN REFRIGERATED TRUCK BODIES WITH A WORLD CLASS RANGE AND NATIONAL SUPPORT



ARC
AU09335

When it comes to ThermoMaxx Advantage, the advantage is to your bottom line.

THERMAXX ADVANTAGE

At ThermoMaxx, we have spent years of research and development to produce our extensive range of high quality truck bodies to meet the high demands of the Australian trucking industry. In order to consistently deliver an industry leading range of truck bodies, we employ the most highly skilled technicians who work with the highest quality and most technologically advanced materials available.

The ThermoMaxx range extends from small ute sized ready-to-deliver bodies, to 10 metre fully customised bodies and everywhere in between, offering business solutions to small businesses, right up to multi-national corporations. Whether you are purchasing a single body for your new business or are looking to upgrade your twenty strong fleet... we have a solution for you.

ThermoMaxx Advantage offers more legal payload, more deliveries, lower fuel bills and lower vehicle maintenance costs. With features such as recessed load track, recessed stainless steel hardware and multiple side door options. The Advantage is to your bottom line.



Technologically advanced materials. Built tough for Australian conditions.



Structural sandwich panel manufactured by unique “wet on wet” moulding process incorporating door frames, mounting points and pallet protection are a feature of all Thermaxx Advantage truck bodies.



When it comes to Thermaxx Advantage the “advantage” is to your bottom line.



Higher Thermal Efficiencies

Technologically advanced materials and construction methods are used in all Thermaxx Advantage truck bodies offering the highest thermal efficiency with the lowest 'K' value of any truck body builder in the Australian market today.

The range of Thermaxx Advantage bodies have been tested to Australian Standard AS4982.

Latest composite technology and aerospace adhesives are used to produce a stronger, lighter truck body with the advantage of higher legal payloads for every trip.

Typically 4500kg GVM vehicles fitted with Thermaxx Advantage bodies have up to a 35% better legal payload than other vehicles.

Lower tare weight means higher legal payload



Lower fuel and maintenance costs

Lower tare weights reduce fuel, wear and tear on suspensions and braking systems.

Better Thermal efficiency reduces refrigeration running costs and reduces maintenance costs and intervals.

All Thermaxx Advantage truck bodies are covered by a full 4 year parts and labour warranty on all components from date in service.

Warranty is available in all capital cities and through our extensive service repairer network.

Industry leading warranty



Body strength and load securing

The Thermaxx Advantage range of bodies have been fully tested by the European certification organisation TUV NORD GmbH & Co and comply with strict testing standard DIN EN 12682.

These standards relate to load security and strength of vehicle superstructures giving you confidence that the Thermaxx Advantage body is built tough for Australian conditions.

Thermaxx Advantage is the only truck body built in Australia that has compliance with EU standards.

The only Australian bodybuilder to offer full warranty and support in all Australian states.

National support



What is 'K' Value?



'K' Value is a value of the amount of thermal conductivity of heat, in watts, that is transferred into a truck or trailer body through leakage or failure of construction materials. In short if your panel is inadequately insulated or the construction methods are sub standard you will have a HIGHER 'K' Value. The LOWER the 'K' Value of the completed body the HIGHER Thermal efficiencies you will have.

Why is 'K' Value important to me and my business?

Testing is critical to those sectors that manage the carriage and cold storage of food and perishables, pharmaceuticals, medical supplies, information technologies and livestock where accurate and consistent temperature control is required to comply with accepted safety standards.

These test results will also allow the buyer to now compare insulated bodies on their performance efficiencies and not simply on look, price or brand preference.

Knowing the actual 'K' Value of an insulated body allows accurately measured performance and capacity, durability and efficiency of cooling and heating systems.

Thermaxx is the only Australian rigid body builder to provide a 'K' Value tested to Australian Standards AS4982 on its product range.

Higher thermal efficiencies mean

- Better temperature control
- Lower fuel costs
- Lower refrigeration setup and maintenance costs
- Less run time



Who is SuperTest?

SuperTest is an independent company that helps the industry find out more about their equipment and processes so that they can achieve cost efficiencies without dramatically effecting operational costs. SuperTest has a significant, purpose-built environmental test centre that provides the mobile and stationary equipment industry with a total capability to test, in real world conditions, HVACR cooling and thermal systems as well as any other component effected by changes in temperature and humidity.

SuperTest is the only facility of its kind in Australasia and has the capability to test up to the largest known registered vehicle in Australia.

Why does Thermaxx use SuperTest?

Thermaxx carry out their own independent testing in Australia to Australian Standard AS4982 so that we can provide you, our client, with relevant information and data.

Therefore when you purchase a new Thermaxx Advantage truck body you can be assured of its thermal efficiency based on actual testing in real world Australian conditions.



"At Woolworths, we have significantly increased our online delivery fleet recently. We have found that the Thermaxx Advantage allows us to make more deliveries in a single run helping the efficiency and the bottom line of the business nationwide."

Simon Peacock, Woolworths



"The Thermaxx product that Micway is currently purchasing is cutting edge. It is built tough to last and fight the Australian climate all year round from the Bundaberg heat to the Canberra cold. Micway believes the Thermaxx product is the current market leader in the small to large rigid temperature controlled truck space and throw in a Thermo King Refrigeration Unit and an Anteo Tailgate and you have a ONE STOP SHOP."

Wayne Franklin, Micway Cold Logistic Solutions



"I highly recommend the team at TRS, they helped us work through what was required and delivered. We look forward to future business with TRS."

Amanda Poulton, Pace Farm



"Transport equipment supply partners that understand the need to respond to our industry product and service needs can be difficult to find let alone trust to support us minimising costly down time. TRS tick all the boxes for us providing the world's best technology in truck bodies, truck & trailer refrigeration and tail lifts. All service supported for us nationally."

Rob Dempster, General Manager, Freezex



MODEL: **A2300N**

THERMAXX ADVANTAGE

THE ADVANTAGE IS TO YOUR BOTTOM LINE

Temperature Capacity
-20°C

Cubic Capacity
4.56m³

BODY DIMENSION

External length	2300mm
External width	1800mm
External height	1460mm
Internal length	2140mm
Internal width	1640mm
Internal height	1300mm
Pallet loading	1 Pallet capacity

Fitted body weight *450kg

PANELS THICKNESS

Roof/floor	80mm
Front wall	80mm
Side walls/rear doors	80mm

Side door	Passenger side single door 1300 x 600mm
Rear door	Double - (left opens first)
Front wall frame	Universal to suit off engine drive units
Side step	Optional
Rear step	Powdercoated rear light assembly bar
Cargo track	Optional
Floor	One piece aluminium ricegrain
Internal light	1 LED sensor light
Refrigeration	Thermo King SV400





Thermal efficiency 'K' VALUE .37 W/m²K tested to Australian Standard AS4982

Standard Inclusions

- High density polyurethane insulation
- European design
- European construction
- Low tare weight
- Higher legal payload
- Galvanised sub frame
- Recessed stainless door hardware
- Stainless door frames
- Anodised corner mouldings
- Long life EPDM rubber seals
- Internal LED lights
- Moulded plastic mud guards
- Options available to suit customer requirements

Model No: A2300N-BCEI

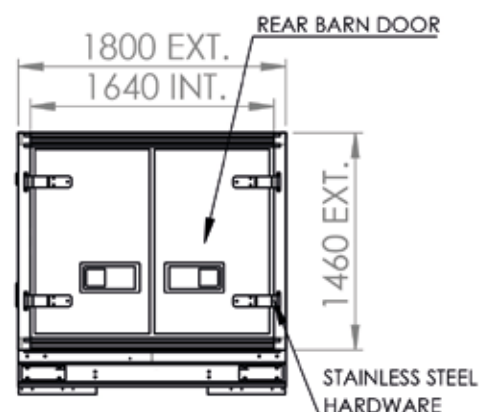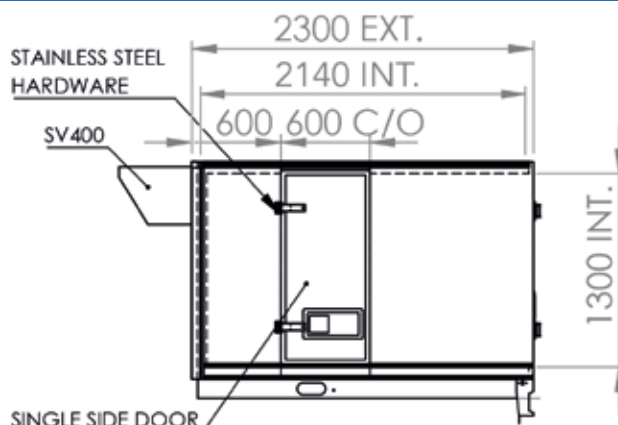



MODEL: **A3000N - CITY BOXX**

THERMAXX ADVANTAGE

THE ADVANTAGE IS TO YOUR BOTTOM LINE

Temperature Capacity
-20°C

Cubic Capacity
10.19m³

BODY DIMENSION

External length	3000mm
External width	2100mm
External height	2000mm
Internal length	2860mm
Internal width	1980mm
Internal height	1800mm
Pallet loading	2 Pallet capacity

Fitted body weight *840kg

PANELS THICKNESS

Roof/floor	100mm
Front wall	80mm
Side walls/rear/side doors	60mm

Side door	Passenger side single door 1800 x 800mm
Rear door	Triple - (centre opens first)
Front wall frame	Universal to suit off engine drive units
Side step	Fixed rung step
Rear step	Fixed plank step
Cargo track	1 recessed row @ 750mm 1 shoring bar
Floor	One piece aluminium ricegrain
Internal light	1 LED sensor light
Refrigeration	Thermo King SV400





Thermal efficiency 'K' VALUE .47 W/m²K tested to Australian Standard AS4982

Standard Inclusions

Model No: A3000N - ACEHI - CITY BOXX

- High density polyurethane insulation
- European design
- European construction
- Low tare weight
- Higher legal payload
- Galvanised sub frame
- Recessed stainless door hardware
- Stainless door frames
- Anodised corner mouldings
- Long life EPDM rubber seals
- Internal LED sensor light
- Rubber bump stops
- Rear/side grab handles
- Recessed load restraint with bar supplied
- Moulded plastic mud guards
- Alloy kick panel
- Options available to suit customer requirements

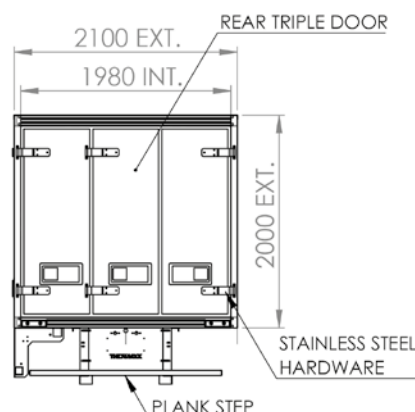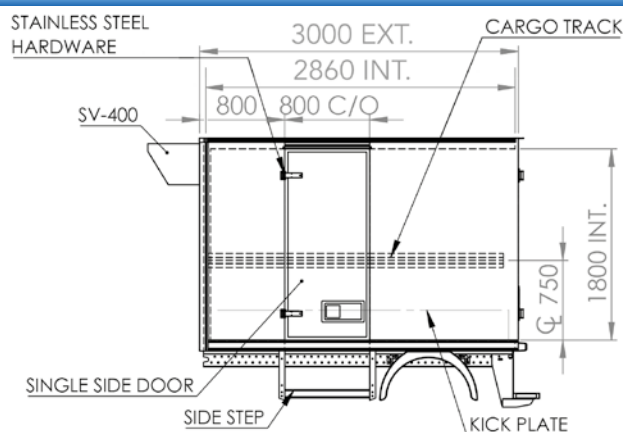



MODEL: **A3700N - CITY BOXX**

THERMAXX ADVANTAGE

THE ADVANTAGE IS TO YOUR BOTTOM LINE

Temperature Capacity
-20°C

Cubic Capacity
14.49m³

BODY DIMENSION

External length	3700mm
External width	2320mm
External height	2050mm
Internal length	3560mm
Internal width	2200mm
Internal height	1850mm
Pallet loading	3 Pallet capacity

Fitted body weight *920kg

PANELS THICKNESS

Roof/floor	100mm
Front wall	80mm
Side walls/rear/side doors	60mm

Side door	Passenger side single door 1850 x 800mm
Rear door	Triple - (centre opens first)
Front wall frame	Universal to suit off engine drive units
Side step	Fixed rung step
Rear step	Fixed plank step
Cargo track	1 recessed row @ 900mm 1 shoring bar
Floor	One piece aluminium ricegrain
Internal light	1 LED sensor light
Refrigeration	Thermo King SV400





Thermal efficiency 'K' VALUE .47 W/m²K tested to Australian Standard AS4982

Standard Features

- High density polyurethane insulation
- European design
- European construction
- Low tare weight
- Higher legal payload
- Galvanised sub frame
- Recessed stainless door hardware
- Stainless door frames
- Anodised corner mouldings
- Long life EPDM rubber seals
- Internal LED sensor lights
- Rubber bump stops
- Rear/side grab handles
- Standard load restraint with bar supplied
- Moulded plastic mud guards
- Options available to suit customer requirements

Model No: A3700N - ACEHI

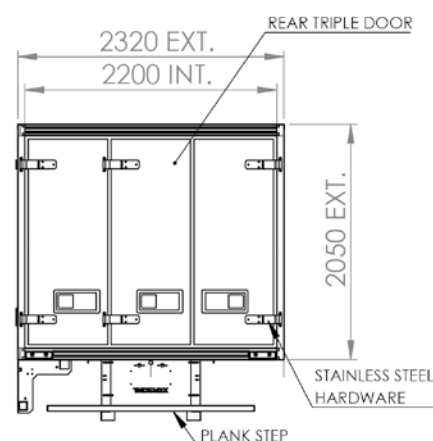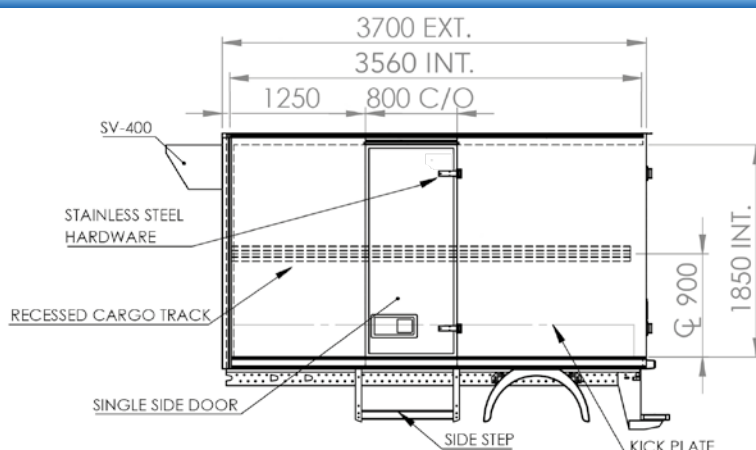



MODEL: **A4060N**

THERMAXX ADVANTAGE

THE ADVANTAGE IS TO YOUR BOTTOM LINE

Temperature Capacity
-20°C

Cubic Capacity
14.18m³

BODY DIMENSION

External length	4060mm
External width	2180mm
External height	2000mm
Internal length	3900mm
Internal width	2020mm
Internal height	1800mm
Pallet loading	3 Pallet capacity

Fitted body weight *1177kg

PANELS THICKNESS

Roof/floor	100mm
Front/side wall	80mm
Rear/side doors	80mm

Side door	Passenger side single door 1450 x 650mm
Rear door	Double - (left opens first)
Front wall frame	Universal to suit off engine drive units
Side step	Fixed rung step
Rear step	Fixed plank step
Cargo track	1 recessed row @ 800mm 1 shoring bar
Floor	Fibreglass non-slip
Internal light	2 LED sensor light
Refrigeration	Thermo King SV400





Thermal efficiency 'K' VALUE .34 W/m²K tested to Australian Standard AS4982

Standard Features

Model No: A4060N - BCFHI

- High density polyurethane insulation
- European design
- European construction
- Low tare weight
- Higher legal payload
- Galvanised sub frame
- Recessed stainless door hardware
- Stainless door frames
- Anodised corner mouldings
- Long life EPDM rubber seals
- Internal LED sensor lights
- Rubber bump stops
- Rear/side grab handles
- Recessed load restraint track
- Moulded plastic mud guards
- Options available to suit customer requirements

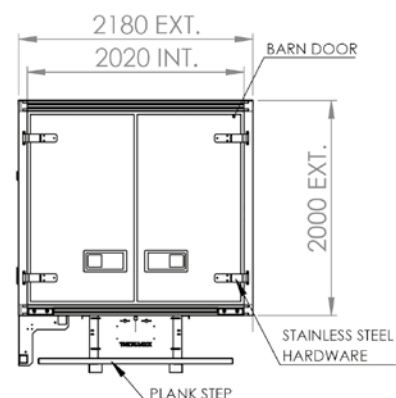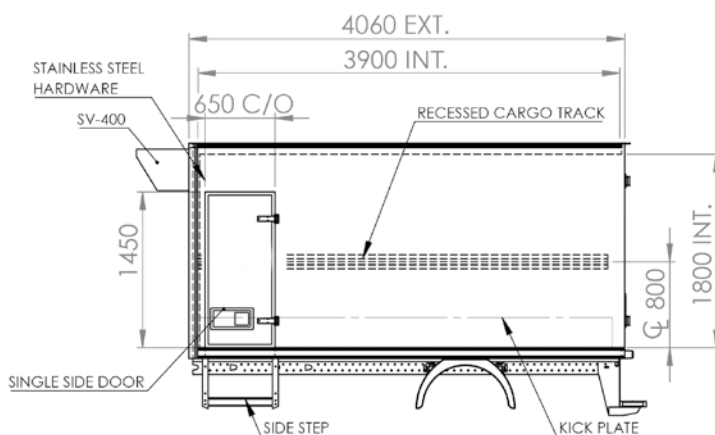

TRS/Thermaxx mission is one of continuous improvement, we reserve the right to change without notice or obligation to modify the technical specifications and aesthetic characteristics of the Thermaxx product. Please note: TRS/Thermaxx provides the information contained herein in good faith and changes may have been made to the product since this brochure went to print (01.11.2018). *Fitted body weight is an approximate weight based on the standard products supplied. Note: final weight may vary based on the type of cab chassis used, and or extra body equipment added. The 4 year warranty is for the Thermaxx Advantage products only.



MODEL: **A4060N**

THERMAXX ADVANTAGE

THE ADVANTAGE IS TO YOUR BOTTOM LINE

Temperature Capacity
-20°C

Cubic Capacity
14.57m³

BODY DIMENSION

External length	4060mm
External width	2180mm
External height	2050mm
Internal length	3900mm
Internal width	2020mm
Internal height	1850mm
Pallet loading	3 Pallet capacity

Fitted body weight *1177kg

PANELS THICKNESS

Roof/floor	100mm
Front/side wall	80mm
Rear/side doors	80mm

Side door	Passenger side single door 1850 x 800mm
Rear door	Triple - (centre opens first)
Front wall frame	Universal to suit off engine drive units
Side step	Fixed rung step
Rear step	Fixed plank step
Cargo track	1 recessed row @ 900mm 1 shoring bar
Floor	One piece aluminium ricegrain
Internal light	1 LED sensor light
Refrigeration	Thermo King SV400





Thermal efficiency 'K' VALUE .37 W/m²K tested to Australian Standard AS4982

Standard Features

- High density polyurethane insulation
- European design
- European construction
- Low tare weight
- Higher legal payload
- Galvanised sub frame
- Recessed stainless door hardware
- Stainless door frames
- Anodised corner mouldings
- Long life EPDM rubber seals
- Internal LED sensor lights
- Rubber bump stops
- Rear/side grab handles
- Recessed load restraint track
- Moulded plastic mud guards
- Options available to suit customer requirements

Model No: A4060N-ACEHI

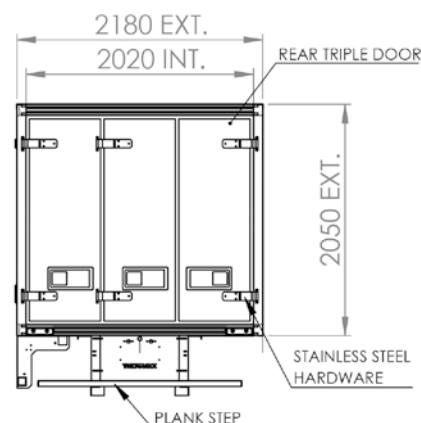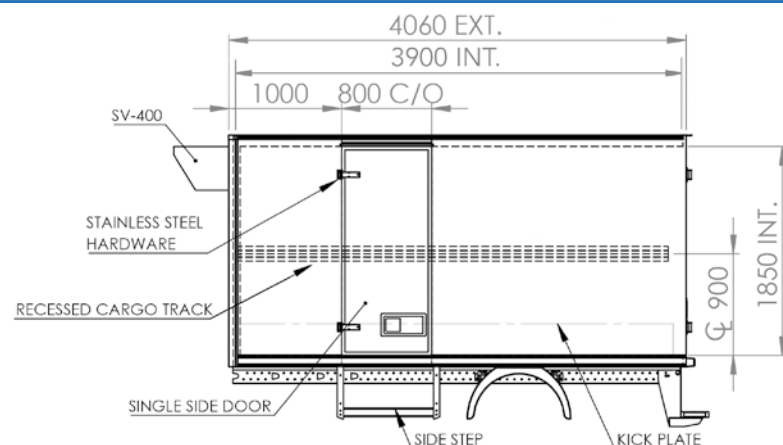



MODEL: **A3300P**

THERMAXX ADVANTAGE

THE ADVANTAGE IS TO YOUR BOTTOM LINE

Temperature Capacity
-20°C

Cubic Capacity
13.62m³

BODY DIMENSION

External length	3300mm
External width	2490mm
External height	2000mm
Internal length	3140mm
Internal width	2410mm
Internal height	1800mm
Pallet loading	4 Pallet capacity

Fitted body weight *1155kg

PANELS THICKNESS

Roof/floor	100mm
Front wall	100mm
Side walls/side doors	40mm
Rear doors	60mm

Side door	Passenger side pallet door 1800 x 1400mm
Rear door	Double - (left opens first)
Front wall frame	Universal to suit off engine drive units
Side step	Fixed rung step
Rear step	Fixed plank step
Cargo track	1 recessed row @ 900mm 1 shoring bar
Floor	One piece aluminium ricegrain
Internal light	1 LED sensor light
Refrigeration	Thermo King SV400





Thermal efficiency 'K' VALUE .57 W/m²K tested to Australian Standard AS4982

Standard Features

- High density polyurethane insulation
- European design
- European construction
- Low tare weight
- Higher legal payload
- Galvanised sub frame
- Recessed stainless door hardware
- Stainless door frames
- Anodised corner mouldings
- Long life EPDM rubber seals
- Internal LED sensor lights
- Rubber bump stops
- Rear/side grab handles
- Moulded plastic mud guards
- Alloy kick panel
- Options available to suit customer requirements

Model No: A3300P-BDEHI

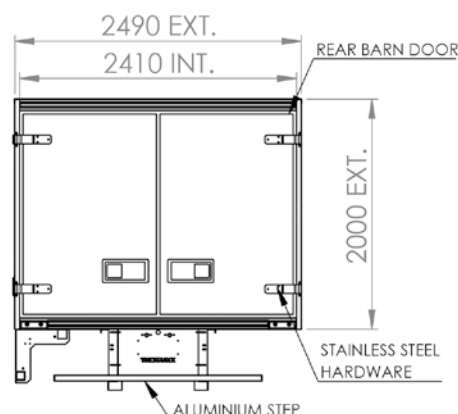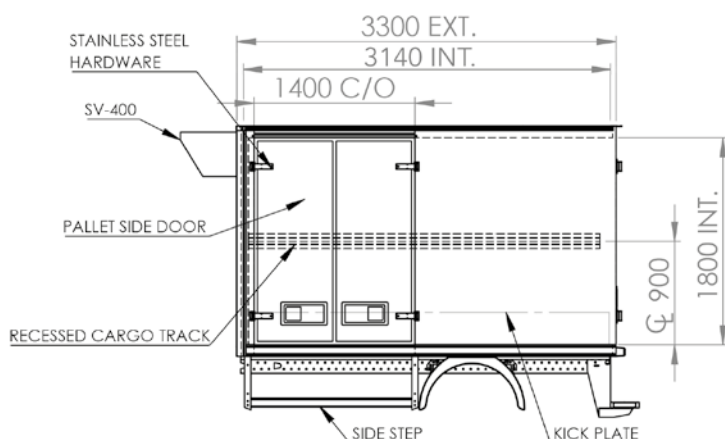

TRS/Thermaxx mission is one of continuous improvement, we reserve the right to change without notice or obligation to modify the technical specifications and aesthetic characteristics of the Thermaxx product. Please note: TRS/Thermaxx provides the information contained herein in good faith and changes may have been made to the product since this brochure went to print (01.11.2018). *Fitted body weight is an approximate weight based on the standard products supplied. Note: final weight may vary based on the type of cab chassis used, and or extra body equipment added. The 4 year warranty is for the Thermaxx Advantage products only.



MODEL: **A4200P Premium**

THERMAXX ADVANTAGE

THE ADVANTAGE IS TO YOUR BOTTOM LINE

Temperature Capacity
-20°C

Cubic Capacity
19.38m³

BODY DIMENSION

External length	4200mm
External width	2490mm
External height	2200mm
Internal length	4020mm
Internal width	2410mm
Internal height	2000mm
Pallet loading	6 Pallet capacity

Fitted body weight *1428kg

PANELS THICKNESS

Roof/floor	100mm
Front wall	100mm
Side walls/side doors	40mm
Rear doors	80mm

Side door	Passenger side pallet door 2000 x 1400mm
Rear door	Triple - (centre opens first)
Front wall frame	Universal to suit off engine drive units
Side step	Fixed rung step
Rear step	Fixed plank step
Cargo track	1 recessed row @ 800mm 1 shoring bar
Floor	One piece aluminium ricegrain
Internal light	2 LED sensor light
Refrigeration	Thermo King SV600





Thermal efficiency 'K' VALUE .59 W/m²K tested to Australian Standard AS4982

Standard Features

Model No: A4200P - ADEHI PREMIUM

- High density polyurethane insulation
- European design
- European construction
- Low tare weight
- Higher legal payload
- Galvanised sub frame
- Recessed stainless door hardware
- Stainless door frames
- Anodised corner mouldings
- Long life EPDM rubber seals
- Internal LED sensor lights
- Rubber bump stops
- Rear/side grab handles
- Recessed load restraint track
- Moulded plastic mud guards
- Alloy kick panel
- Options available to suit customer requirements

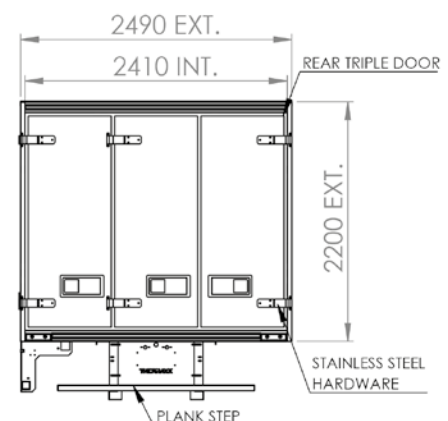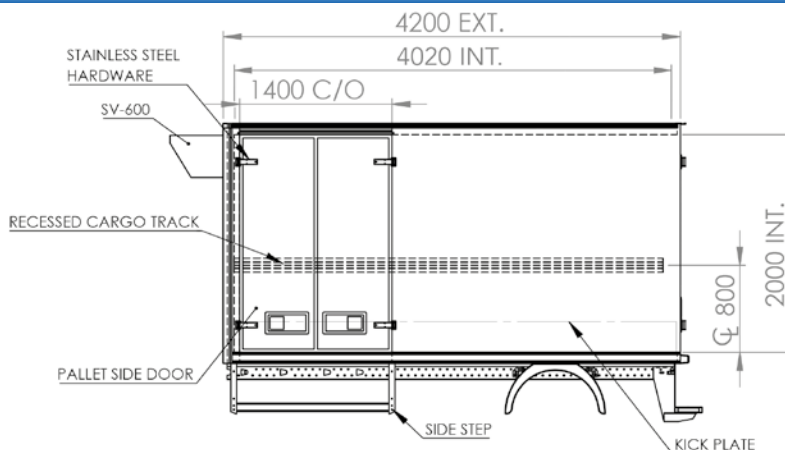



MODEL: **A4200P**

THERMAXX ADVANTAGE

THE ADVANTAGE IS TO YOUR BOTTOM LINE

Temperature Capacity
-20°C

Cubic Capacity
19.38m³

BODY DIMENSION

External length	4200mm
External width	2490mm
External height	2200mm
Internal length	4020mm
Internal width	2410mm
Internal height	2000mm
Pallet loading	6 Pallet capacity

Fitted body weight *1428kg

PANELS THICKNESS

Roof/floor	100mm
Front wall	100mm
Side walls/side doors	40mm
Rear doors	80mm

Side door	Passenger side single door 2000 x 800mm
Rear door	Double - (centre opens first)
Front wall frame	Universal to suit off engine drive units
Side step	Fixed rung step
Rear step	Fixed plank step
Cargo track	1 recessed row @ 800mm 1 shoring bar
Floor	One piece aluminium ricegrain
Internal light	2 LED sensor light
Refrigeration	Thermo King SV600





Thermal efficiency 'K' VALUE .55 W/m²K tested to Australian Standard AS4982

Standard Features

- High density polyurethane insulation
- European design
- European construction
- Low tare weight
- Higher legal payload
- Galvanised sub frame
- Recessed stainless door hardware
- Stainless door frames
- Anodised corner mouldings
- Long life EPDM rubber seals
- Internal LED sensor lights
- Rubber bump stops
- Rear/side grab handles
- Recessed load restraint track
- Moulded plastic mud guards
- Alloy kick panel
- Options available to suit customer requirements

Model No: A4200P-BCEHI

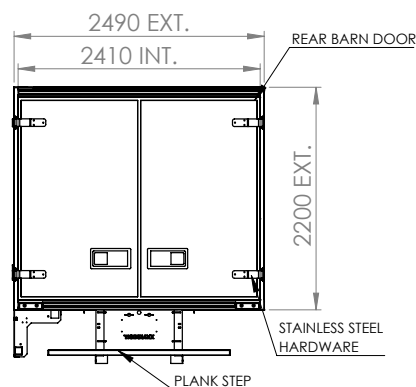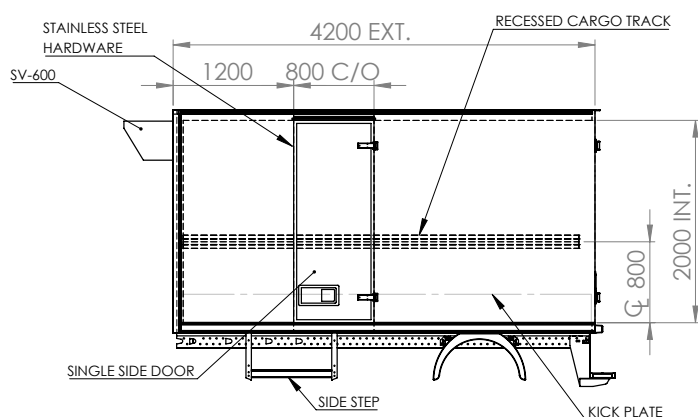



MODEL: **A4950P**

THERMAXX ADVANTAGE

THE ADVANTAGE IS TO YOUR BOTTOM LINE

Temperature Capacity
-20°C

Cubic Capacity
23.34m³

BODY DIMENSION

External length	4950mm
External width	2490mm
External height	2230mm
Internal length	4770mm
Internal width	2410mm
Internal height	2030mm
Pallet loading	6 - 8 Pallet capacity

Fitted body weight *1680kg

PANELS THICKNESS

Roof/floor	100mm
Front wall	100mm
Side walls/side doors	40mm
Rear doors	80mm

Side door	Passenger side pallet door 2030 x 1400mm
Rear door	Double - (left opens first)
Front wall frame	Universal to suit off engine drive units
Side step	Fixed rung step
Rear step	Fixed plank step
Cargo track	2 recessed row 1 @ 800mm 2 shoring bars 1 @ 1200
Floor	One piece aluminium ricegrain
Internal light	2 LED sensor light
Refrigeration	Thermo King SV600




Thermal efficiency 'K' VALUE .57 W/m²K tested to Australian Standard AS4982

Standard Features

- High density polyurethane insulation
- European design
- European construction
- Low tare weight
- Higher legal payload
- Steel sub frame
- Recessed stainless door hardware
- Stainless door frames
- Anodised corner mouldings
- Long life EPDM rubber seals
- Internal LED sensor lights
- Rubber bump stops
- Rear/side grab handles
- Recessed load restraint track
- Moulded plastic mud guards
- Alloy kick panel
- Options available to suit customer requirements

Model No: A4950P-BDEHI

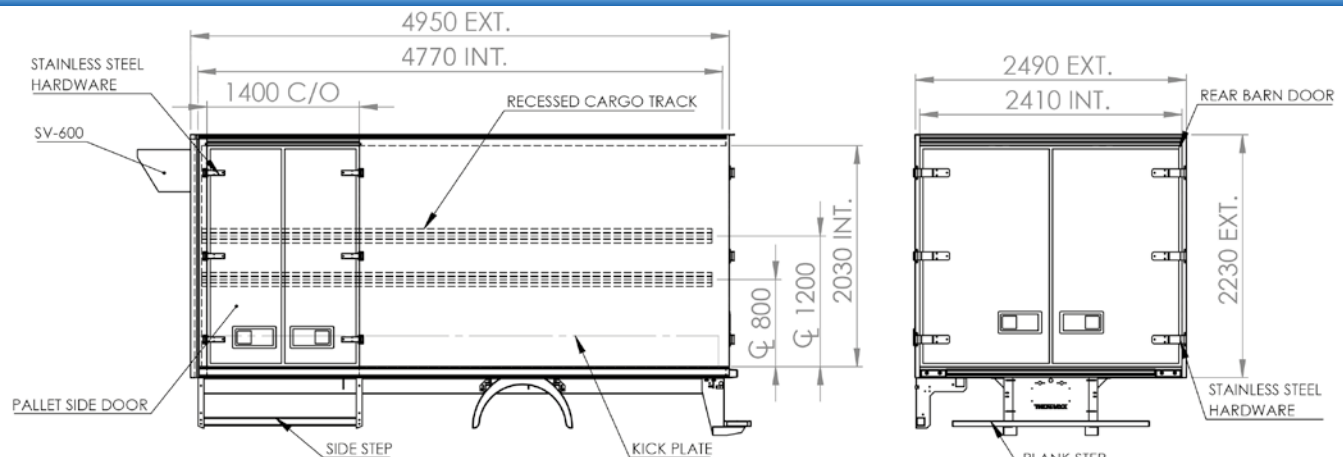



MODEL: **A5500P**

THERMAXX ADVANTAGE

THE ADVANTAGE IS TO YOUR BOTTOM LINE

Temperature Capacity
-20°C

Cubic Capacity
28.21m³

BODY DIMENSION

External length	5500mm
External width	2490mm
External height	2400mm
Internal length	5320mm
Internal width	2410mm
Internal height	2200mm
Pallet loading	8 Pallet capacity

Fitted body weight *2090kg

PANELS THICKNESS

Roof/floor	100mm
Front wall	100mm
Side walls/side doors	40mm
Rear doors	80mm

Side door	Passenger side pallet door 2200 x 1400mm
Rear door	Double - (left opens first)
Front wall frame	Universal to suit diesel drive units
Side step	Fixed rung step
Rear step	Fixed plank step
Cargo track	1 recessed row @ 800mm 1 shoring bar
Floor	One piece aluminium ricegrain
Internal light	2 LED sensor light
Refrigeration	Thermo King T-800R





Thermal efficiency 'K' VALUE .57 W/m²K tested to Australian Standard AS4982

Standard Features

Model No: A5500P - BDEHI

- High density polyurethane insulation
- European design
- European construction
- Low tare weight
- Higher legal payload
- Steel sub frame
- Recessed stainless door hardware
- Stainless door frames
- Anodised corner mouldings
- Long life EPDM rubber seals
- Internal LED sensor lights
- Rubber bump stops
- Rear/side grab handles
- Recessed load restraint track
- Moulded plastic mud guards
- Alloy kick panel
- Options available to suit customer requirements

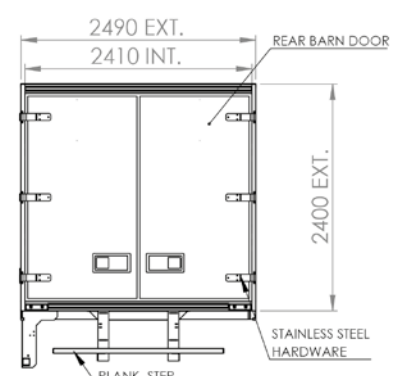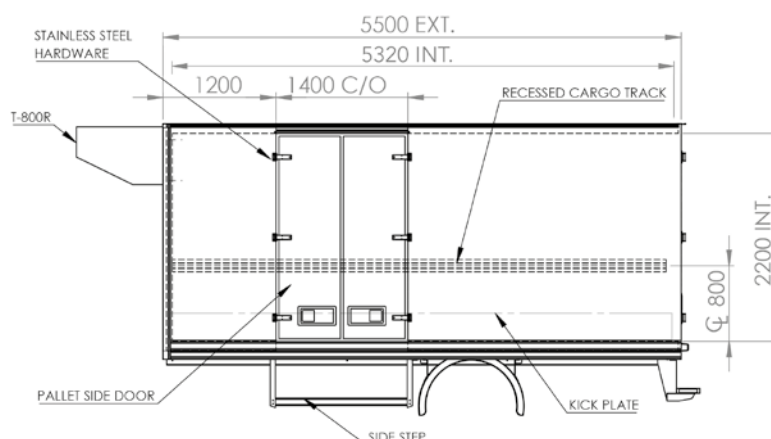

TRS/Thermaxx mission is one of continuous improvement, we reserve the right to change without notice or obligation to modify the technical specifications and aesthetic characteristics of the Thermaxx product. Please note: TRS/Thermaxx provides the information contained herein in good faith and changes may have been made to the product since this brochure went to print (01.11.2018). *Fitted body weight is an approximate weight based on the standard products supplied. Note: final weight may vary based on the type of cab chassis used, and or extra body equipment added. The 4 year warranty is for the Thermaxx Advantage products only.



MODEL: **A5500P Premium**

THERMAXX ADVANTAGE

THE ADVANTAGE IS TO YOUR BOTTOM LINE

Temperature Capacity
-20°C

Cubic Capacity
28.21 m³

BODY DIMENSION

External length	5500mm
External width	2490mm
External height	2400mm
Internal length	5320mm
Internal width	2410mm
Internal height	2200mm
Pallet loading	8 Pallet capacity

Fitted body weight *2090kg

PANELS THICKNESS

Roof/floor	100mm
Front wall	100mm
Side walls/side doors	40mm
Rear doors	80mm

Side door	Passenger side pallet door 2200 x 1400mm
Rear door	Triple - (centre opens first)
Front wall frame	Universal to suit diesel drive units
Side step	Fixed rung step
Rear step	Fixed plank step
Cargo track	1 recessed row @ 800mm 1 shoring bar
Floor	One piece aluminium ricegrain
Internal light	2 LED sensor light
Refrigeration	Thermo King T-800R





Thermal efficiency 'K' VALUE .59 W/m²K tested to Australian Standard AS4982

Standard Features

Model No: A5500P - ADEHI

- High density polyurethane insulation
- European design
- European construction
- Low tare weight
- Higher legal payload
- Steel sub frame
- Recessed stainless door hardware
- Stainless door frames
- Anodised corner mouldings
- Long life EPDM rubber seals
- Internal LED sensor lights
- Rubber bump stops
- Rear/side grab handles
- Recessed load restraint track
- Moulded plastic mud guards
- Alloy kick panel
- Options available to suit customer requirements

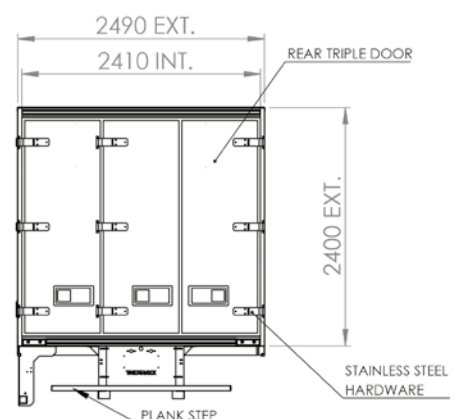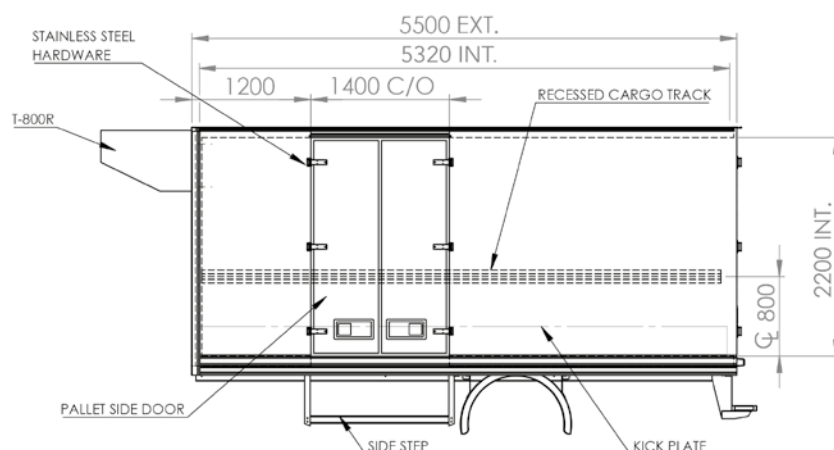



MODEL: **A6500P**

THERMAXX ADVANTAGE

THE ADVANTAGE IS TO YOUR BOTTOM LINE

Temperature Capacity
-20°C

Cubic Capacity
33.51m³

BODY DIMENSION

External length	6500mm
External width	2490mm
External height	2400mm
Internal length	6320mm
Internal width	2410mm
Internal height	2200mm
Pallet loading	10 Pallet capacity

Fitted body weight *2405kg

PANELS THICKNESS

Roof/floor	100mm
Front wall	100mm
Side walls/side doors	40mm
Rear doors	80mm

Side door	Passenger side pallet door 2200 x 1400mm
Rear door	Double - (left opens first)
Front wall frame	Universal to suit diesel drive units
Side step	Fixed rung step
Rear step	Flush crash bar
Cargo track	1 recessed row @ 1000mm 1 shoring bar
Floor	One piece aluminium ricegrain
Internal light	2 LED sensor light
Refrigeration	Thermo King T-1000R





Thermal efficiency 'K' VALUE .57 W/m²K tested to Australian Standard AS4982

Standard Features

Model No: A6500P - BDEHI

- High density polyurethane insulation
- European design
- European construction
- Low tare weight
- Higher legal payload
- Steel sub frame
- Recessed stainless door hardware
- Stainless door frames
- Anodised corner mouldings
- Long life EPDM rubber seals
- Internal LED sensor lights
- Rubber bump stops
- Rear/side grab handles
- Recessed load restraint track
- Moulded plastic mud guards
- Alloy kick panel
- Options available to suit customer requirements

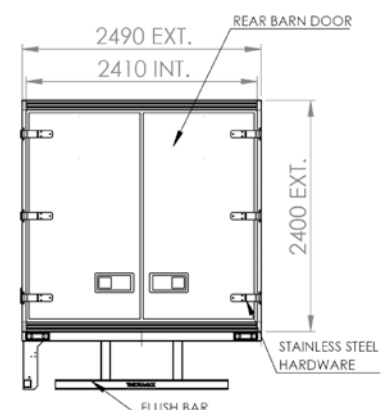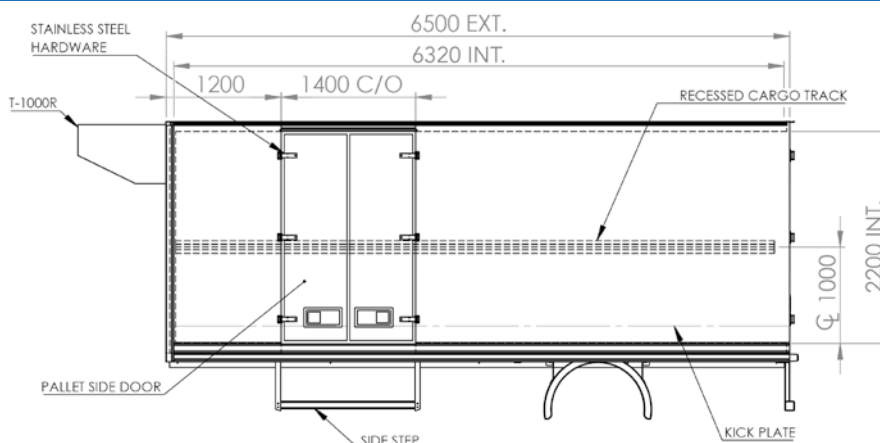

TRS/Thermaxx mission is one of continuous improvement, we reserve the right to change without notice or obligation to modify the technical specifications and aesthetic characteristics of the Thermaxx product. Please note: TRS/Thermaxx provides the information contained herein in good faith and changes may have been made to the product since this brochure went to print (01.11.2018). *Fitted body weight is an approximate weight based on the standard products supplied. Note: final weight may vary based on the type of cab chassis used, and or extra body equipment added. The 4 year warranty is for the Thermaxx Advantage products only.



MODEL: **A7800P**

THERMAXX ADVANTAGE

THE ADVANTAGE IS TO YOUR BOTTOM LINE

Temperature Capacity
-20°C

Cubic Capacity
45.11m³

BODY DIMENSION

External length	7800mm
External width	2490mm
External height	2650mm
Internal length	7640mm
Internal width	2410mm
Internal height	2450mm
Pallet loading	12 Pallet capacity

Fitted body weight *3354kg

PANELS THICKNESS

Roof/floor	100mm
Front wall	100mm
Side walls	40mm
Rear doors	60mm

Side door	N/A
Rear door	Double (left opens first)
Front wall frame	Universal to suit diesel drive units
Side step	N/A
Rear step	Heavy duty crash bar
Cargo track	2 recessed row @ 800-1400mm 2 shoring bars
Floor	One piece aluminium ricegrain
Internal light	2 LED sensor light
Refrigeration	Thermo King T-1000R




Thermal efficiency 'K' VALUE .55 W/m²K tested to Australian Standard AS4982

Standard Features

- High density polyurethane insulation
- European design
- European construction
- Low tare weight
- Higher legal payload
- Steel sub frame
- Recessed stainless door hardware
- Stainless door frames
- Anodised corner mouldings
- Long life EPDM rubber seals
- Internal LED sensor lights
- Rubber bump stops
- Rear/side grab handles
- Recessed load restraint track
- Moulded plastic mud guards
- Alloy kick panel
- Options available to suit customer requirements

Model No: A7800P-BEHI

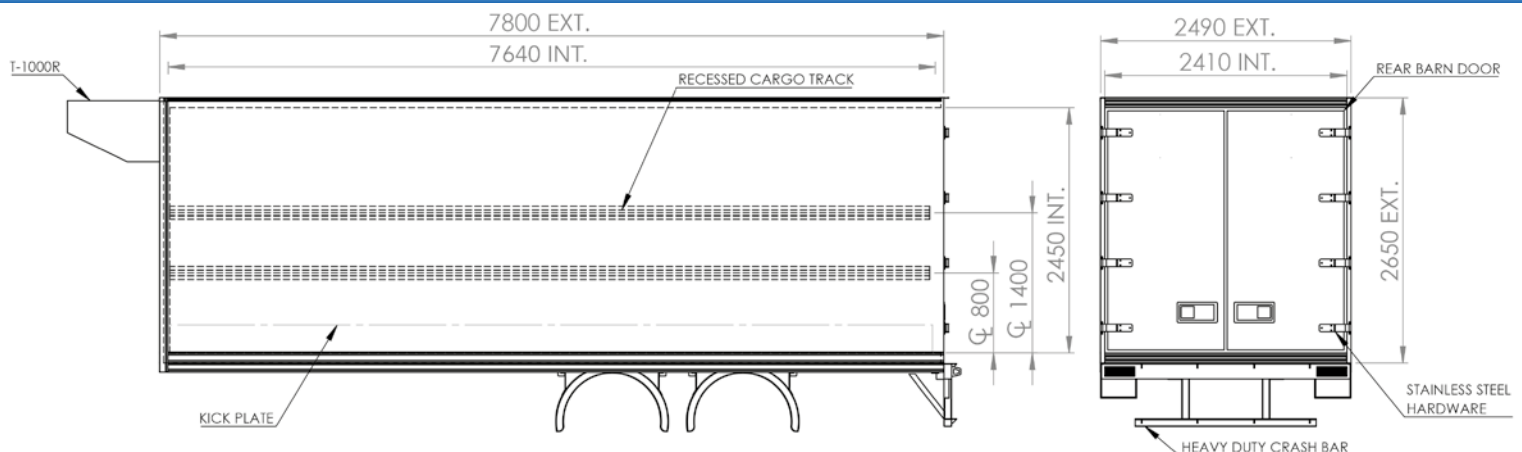



MODEL: **A7800P**

THERMAXX ADVANTAGE

THE ADVANTAGE IS TO YOUR BOTTOM LINE

Temperature Capacity
-20°C

Cubic Capacity
45.11m³

BODY DIMENSION

External length	7800mm
External width	2490mm
External height	2650mm
Internal length	7640mm
Internal width	2410mm
Internal height	2450mm
Pallet loading	12 Pallet capacity

Fitted body weight *3354kg

PANELS THICKNESS

Roof/floor	100mm
Front wall	100mm
Side walls/side doors	40mm
Rear doors	60mm

Side door	Passenger side pallet door 2450 x 1400mm
Rear door	Double - (left opens first)
Front wall frame	Universal to suit diesel drive units
Side step	Fixed rung step
Rear step	Heavy duty crash bar
Cargo track	2 recessed row @ 800-1400mm 2 shoring bars
Floor	One piece aluminium ricegrain
Internal light	2 LED sensor light
Refrigeration	Thermo King T-1000R




Thermal efficiency 'K' VALUE .57 W/m²K tested to Australian Standard AS4982

Standard Features

Model No: A7800-BDEHI

- High density polyurethane insulation
- European design
- European construction
- Low tare weight
- Higher legal payload
- Steel sub frame
- Recessed stainless door hardware
- Stainless door frames
- Anodised corner mouldings
- Long life EPDM rubber seals
- Internal LED sensor lights
- Rubber bump stops
- Rear/side grab handles
- Recessed load restraint track
- Moulded plastic mud guards
- Alloy kick panel
- Options available to suit customer requirements

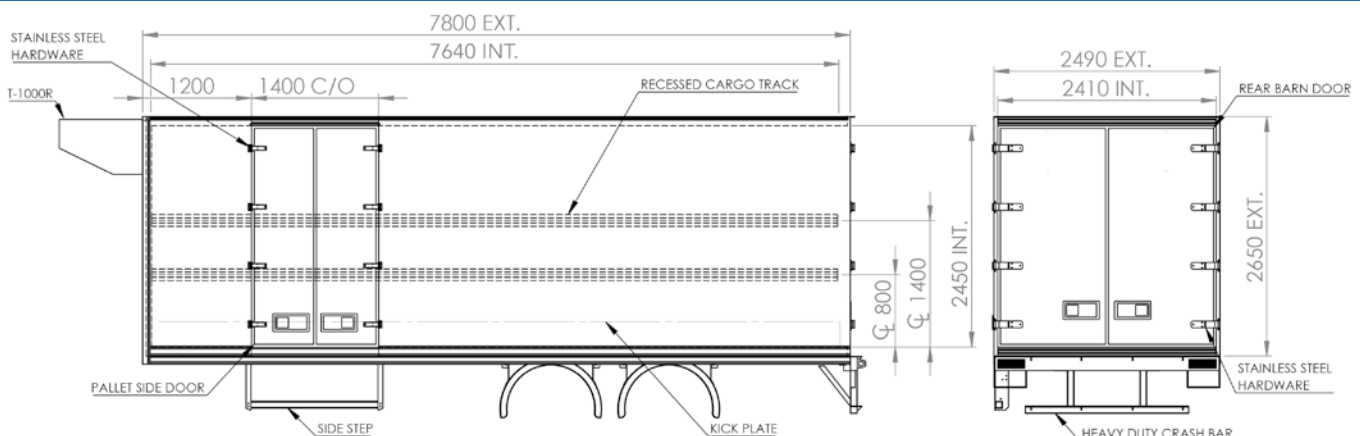

TRS/Thermaxx mission is one of continuous improvement, we reserve the right to change without notice or obligation to modify the technical specifications and aesthetic characteristics of the Thermaxx product. Please note: TRS/Thermaxx provides the information contained herein in good faith and changes may have been made to the product since this brochure went to print (01.11.2018). *Fitted body weight is an approximate weight based on the standard products supplied. Note: final weight may vary based on the type of cab chassis used, and or extra body equipment added. The 4 year warranty is for the Thermaxx Advantage products only.



MODEL: **A7850P**

THERMAXX ADVANTAGE

THE ADVANTAGE IS TO YOUR BOTTOM LINE

Temperature Capacity
-20°C

Cubic Capacity
47.32m³

BODY DIMENSION

External length **7850mm**
External width **2490mm**
External height **2650mm**

Internal length **7620mm**
Internal width **2410mm**
Internal height **2450mm**

Pallet loading **12 Pallet capacity**

Fitted body weight *3754kg

PANELS THICKNESS

Roof/floor **100mm**
Front wall **100mm**
Side walls/side doors **40mm**

Side door	N/A
Rear door	65mm freezer rated roller shutter door with galvanised frame
Front wall frame	Universal to suit diesel drive units
Side step	N/A
Rear step	Heavy duty crash bar
Cargo track	2 recessed row @ 800-1400mm 2 shoring bars
Floor	One piece aluminium ricegrain
Internal light	3 LED sensor light
Refrigeration	Thermo King T-1000R




Thermal efficiency 'K' VALUE .64 W/m²K tested to Australian Standard AS4982

Standard Features

- High density polyurethane insulation
- European design
- European construction
- Low tare weight
- Higher legal payload
- Steel sub frame
- Stainless door frames
- Anodised corner mouldings
- Long life EPDM rubber seals on roller door
- Internal LED sensor lights
- Rubber bump stops
- Rear/side grab handles

Model No: A7850P-EHO

- Recessed load restraint track
- Moulded plastic mud guards
- Alloy kick panel
- Options available to suit customer requirements
- Heavy duty galvanised rear door frame

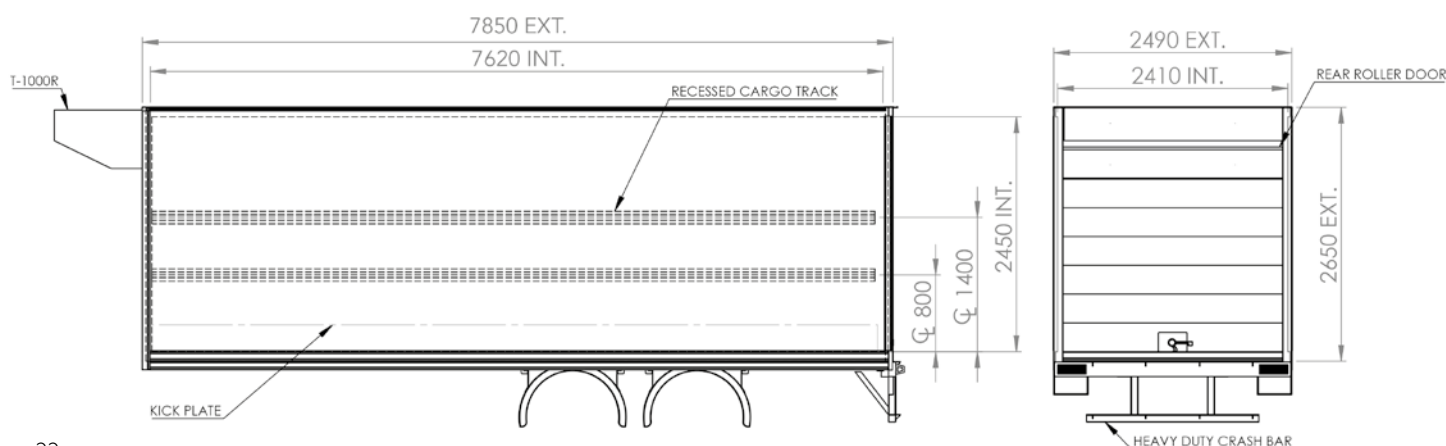



MODEL: **A9000P**

THERMAXX ADVANTAGE

THE ADVANTAGE IS TO YOUR BOTTOM LINE

Temperature Capacity
-20°C

Cubic Capacity
52.08m³

BODY DIMENSION

External length	9000mm
External width	2490mm
External height	2650mm
Internal length	8820mm
Internal width	2410mm
Internal height	2450mm
Pallet loading	14 Pallet capacity

Fitted body weight *3870kg

PANELS THICKNESS

Roof/floor	100mm
Front wall	100mm
Side walls/side doors	40mm
Rear doors	80mm

Side door	N/A
Rear door	Double (left opens first)
Front wall frame	Universal to suit diesel drive units
Side step	N/A
Rear step	Heavy duty crash bar
Cargo track	2 recessed row @ 800-1400mm 2 shoring bars
Floor	One piece aluminium ricegrain
Internal light	4 LED sensor light
Refrigeration	Thermo King T-1200R




Thermal efficiency 'K' VALUE .55 W/m²K tested to Australian Standard AS4982

Standard Features

- High density polyurethane insulation
- European design
- European construction
- Low tare weight
- Higher legal payload
- Steel sub frame
- Recessed stainless door hardware
- Stainless door frames
- Anodised corner mouldings
- Long life EPDM rubber seals
- Internal LED sensor lights
- Rubber bump stops
- Rear/side grab handles
- Recessed load restraint track
- Moulded plastic mud guards
- Alloy kick panel
- Options available to suit customer requirements
- 2 Lock rods per door

Model No: A9000P - BEHI

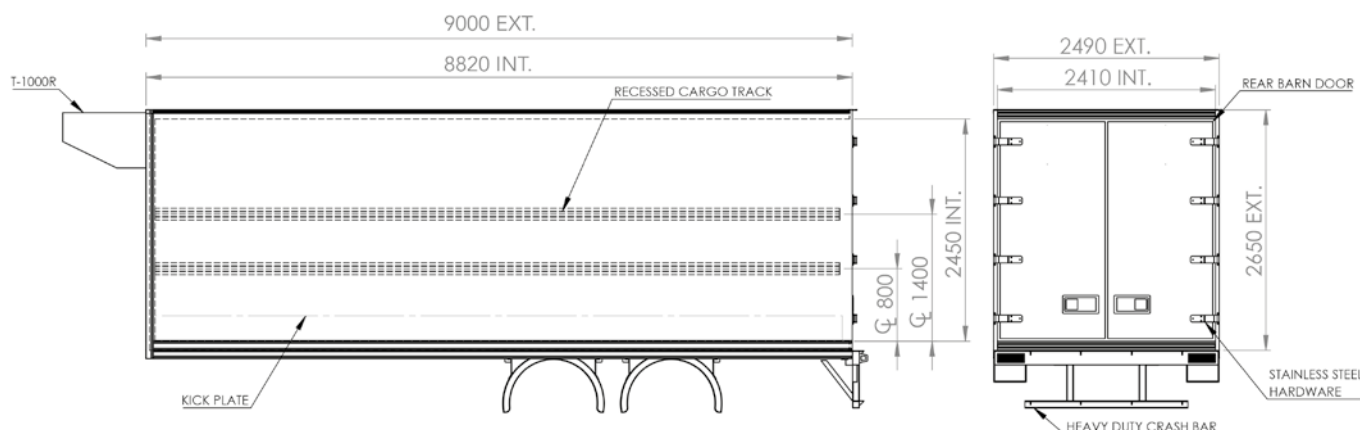

TRS/Thermaxx mission is one of continuous improvement, we reserve the right to change without notice or obligation to modify the technical specifications and aesthetic characteristics of the Thermaxx product. Please note: TRS/Thermaxx provides the information contained herein in good faith and changes may have been made to the product since this brochure went to print (01.11.2018). *Fitted body weight is an approximate weight based on the standard products supplied. Note: final weight may vary based on the type of cab chassis used, and or extra body equipment added. The 4 year warranty is for the Thermaxx Advantage products only.



MODEL: **A9050P**

THERMAXX ADVANTAGE

THE ADVANTAGE IS TO YOUR BOTTOM LINE

Temperature Capacity
-20°C

Cubic Capacity
52.08m³

BODY DIMENSION

External length	9050mm
External width	2490mm
External height	2650mm
Internal length	8820mm
Internal width	2410mm
Internal height	2450mm
Pallet loading	14 Pallet capacity

Fitted body weight *4270kg

PANELS THICKNESS

Roof/floor	100mm
Front wall	100mm
Side walls	40mm

Side door	N/A
Rear door	65mm freezer rated roller shutter door with galvanised frame
Front wall frame	Universal to suit diesel drive units
Side step	N/A
Rear step	Heavy duty crash bar
Cargo track	2 recessed row @ 800-1400mm 2 shoring bars
Floor	One piece aluminium ricegrain
Internal light	4 LED sensor light
Refrigeration	Thermo King T-1200R




Thermal efficiency 'K' VALUE .64 W/m²K tested to Australian Standard AS4982

Standard Features

Model No: **A9050P-EHO**

- High density polyurethane insulation
- European design
- European construction
- Low tare weight
- Higher legal payload
- Steel sub frame
- Anodised corner mouldings
- Long life EPDM rubber seals on roller door
- Internal LED sensor lights
- Rubber bump stops
- Rear/side grab handles
- Recessed load restraint track
- Moulded plastic mud guards
- Alloy kick panel
- Options available to suit customer requirements
- Heavy duty galvanised rear door frame

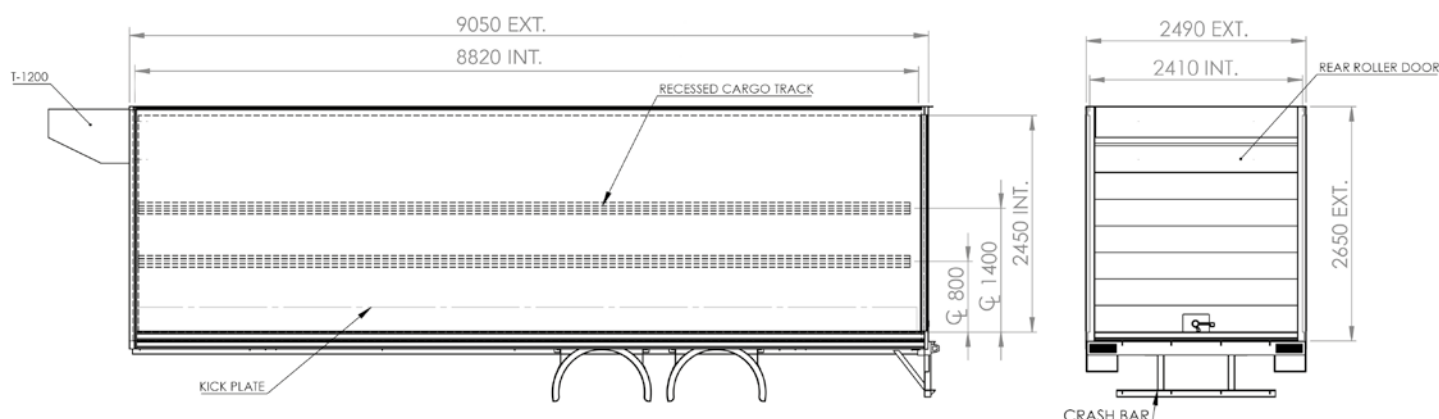

THERMAXX

CUSTOM



Thermaxx Options

We have an extensive selection of options for all Thermaxx bodies, this is only a small selection, just ask our sales team for any option you may require and we will endeavour to supply you the perfect options.



PVC rear door curtain
fixed and sliding



PVC side door curtain fixed
and sliding



Blue loose walls
Max height 2720 width 2400mm



Fan kit to suit dividing wall



Checker plate mudguards



Extra side lights



External or internal lights



Tool box stainless steel and
plastic, various sizes




Catchment tank supplied and
installed to plumbing floor drains



Hand wash tank



Fire extinguisher cabinet



Floor drain in Advantage body



Fold down single side step



Fold down rear step
1400 or 1700mm



Fold down pallet width side step



Double fold down rear step
(left)



Double fold down rear step
(centre)



Double fold down
pallet side step



Double fold down
single side step



Pull out ramp



Meat rails



Toddco roller doors
Chiller and freezer



Drop down walls



Gas struts for drop down walls



Trolley rack



Grab handle



Cargo Bars and track



Roof Duct System

THERMAXX**ADVANTAGE**

Thermaxx is a division of

**NSW**

3 Distillers Place
Huntingwood, NSW 2148
(02) 8822 8100

VIC

14 Industrial Avenue
Hoppers Crossing, VIC 3029
(03) 9082 3100

QLD

76 Zilmere Road
Boondall, QLD 4034
(07) 3903 3000

SA

350 Cormack Road
Wingfield, SA 5013
(08) 8262 2555

thermaxx.com.au